

11/27/02

Tivo Show Control

Serial #03

Preliminary, Beta Version,
Guinea Pig Owner's Manual
HW

The New Tivo Show Control System— Version 1.0

Congratulations! You have just added the most important upgrade to your Classic Rock-Afire Explosion in 23 years, the “**Tivo Show Controller**”! With this new controller, so many problems associated with reel-to-reel decks are gone forever! As you may know, the Tivo is a commonly available Digital Video Recorder designed for the consumer market. It allows many hours of video and audio storage and normally takes the place of a VCR in America’s homes. The Tivo Show Controller harnesses this amazing storage capability and utilizes it to play many dozens of shows originally created to operate off of reel-to-reel tape. The AGFM (Anti-Gravity Freedom Machine) is the computer inside the Tivo Show Controller Box that manages the functions of the Tivo while monitoring customer selection buttons, manager preferences and control decisions, the house lights, and video switching for the monitors in the audience.

Background Information About Show Types

The Tivo holds individual shows of various types:

1– “**Normal Shows**” which all have a Thank You Show Before Them. These are your typical shows such as a character singing a song. These are the shows that are available to the customer when he presses a button.

2– “**Thank You Shows**” are recorded on the Tivo right before every “Normal Show”. They play just prior to the “Normal Show” whenever a “Normal Show” is selected by a customer button press. The “Thank You” show is set to come on immediately upon the pressing of a Show Select Button by a customer. After the Thank You Show Plays, the “Normal Show” will play. At this time, there is a Thank You Show for every Normal Show recorded on the Tivo. By placing a Thank You Show on the Tivo before every Normal Show, we control the amount of search time required between the Thank You Show and the Normal Show and keep it to a minimum. It is anticipated that future versions of the Tivo Show Controller will not be set up this way, because it does take up more hard drive space to do this. When the search algorithms are sped up significantly, there will not be a need to duplicate Thank You shows on the Tivo Unit.

4– **Special Shows**- These are shows selected specifically by the manager to play on demand. Of course, any show can be played on demand by entering its Clip # in Option #5 (“Play Show by Number”), but these are the shows that are usually tied to a specific event, like a birthday party, or a karaoke performance request. The “Special Shows” are listed in Option #3 (“Play Special Show”) on the Main Menu. One such special show is a “**Birthday Show**”.

A– Birthday Shows– These are shows normally chosen and played on cue for someone’s birthday celebration. These are not on the “Normal Shows” play list, because they are reserved for those special occasions. Therefore, the “Birthday Shows” do not have associated “Thank You” shows recorded on the Tivo that play before them. If we thought we might like to have a Birthday Show or any other type of Special Show Play on the regular play list, we gave it a Thank You Show (before it) so it can.

B– Other Special Shows- There are other shows, similar to “**Birthday Shows**” which are chosen by the manager to play at special times rather than allowed to play on the normal Play List. For instance, the “**Goodnight**” song is reserved for those special moments at the end of the day when you are trying to politely tell your audience that it’s time to leave. Therefore, it is not playing throughout the day and is triggered by a manager request and, therefore, never needs to play a Thank You Show. However, we put one on before it anyway. It doesn’t hurt anything and allows this show to go on a play list if you might ever want it to. Another special show would be a “**Karaoke Show**” There are several “**Karaoke**” shows on the Gold Tivo Collection and they are handled much the same way the Birthday Shows are handled in that they are selectable from the “Play A Special Show Button” on the Main Menu.

Before you Set Up Read This

The two main components to the Tivo Control System are the Tivo Itself, and the **Tivo Control Box** with the internally mounted AGFM. Also, you will find three little video monitors.

Monitor #1 will have your on-screen menus and information about the state of the system. We call this the "**Manager's Monitor**" because it is the one the Manager will use all the time to select the operational mode of the system, or to play particular shows. This monitor has both audio and video wires connected to the Tivo Control Box so you can hear the sounds the AGFM makes as you press the on-screen buttons.

Monitor #2 shows you the inner workings and videos on the Tivo so you can easily monitor what the Tivo is doing in response to the signals being sent to it from the AGFM. We call this the "**Tivo Monitor**".

Monitor #3 shows you what is being sent out to the video monitors in the Show Room. Normally, this is the video stuff coming off the Tivo without the inner workings like the Now Showing List and other Tivo menus being seen by the general public. This is called the "**Showroom Monitor**". Monitors 2 and 3 provide excellent tools for debugging or just understanding how the system operates.

You can place these 5 components anywhere you want as long as you can run 3 RCA cables into your present "Tech Room" from the back of the Tivo Control Box. It is a good idea to keep the Tivo and the Tivo Control Box close to each other, preferably with the Tivo Controller sitting on top of the Tivo. But, you could mount these components to suit your needs as long as they are connected to each other properly. All panel jacks have been labeled with the name of the jack, its function, and the jack it needs to connect to just so that it will be easier to connect it up correctly, even without referring to the manual. The connections to the equipment are shown on the following page as well.

You will need to provide 3 RCA cables of whatever length is required to connect the Top and Bottom Drawer jacks on the back of the Tivo Controller and the Audio Jack (Left Channel) from the Tivo to the Audio System. You may also need an RCA splitter so you can provide the monaural audio signal to both channels of your audio amplifier.

The Manager's Monitor and the Keyboard Receiver may be placed wherever you wish to facilitate where you wish to control the Tivo Controller from. It may even be in a different room. All you have to do is provide long enough RCA cables to connect the monitor and provide a keyboard extension if necessary and set the Keyboard IR Receiver up in such a way that it has a line of sight to the wireless keyboard. You may also wish to run an extension from the Manager's Button to your remote control location. There is no jack on the system for this, so if you want to provide a remote Manager's Button, you will have to wire it to the button installed in the Tivo Controller and route the wires out of the Tivo Controller yourself

How to Setup and Test Your Tivo Show Controller

1. **Find a nice open area or table to set everything up on.** You should start by setting up this system in an isolated area, away from where you are going to install it just so you will have the warm fuzzies about what you expect to happen when you disconnect your old system and connect this new system. You will already have confidence that this system has passed its diagnostics tests before you unplug any wires from your existing system.
2. **Check your inventory of parts.** Here's what I sent to you:
 - A. One Tivo Controller Box- Looks like the "old DBX Box" from the show.
 - B. One Tivo Recorder—Looks like a VCR with no slot for the tape. No knobs or buttons on the front
 - C. Three Separately packed little video monitors in their own boxes.
 - E. One wireless keyboard. (Batteries already installed)
 - D. One Wireless Keyboard
 - E. One Square Button with a wire hanging off of it.
 - E. A Bag of small stuff: power cords, DC Wal Wart, and audio cables , Tivo Remote, etc. Specifically:
 1. Three 6' Stereo Audio Cables
 2. One 6' Single Conductor Audio Cables
 3. One AGFM DC Power Supply (Wall Wart style)
 4. Two small, white extension cords.
 5. Tivo Power Cord.
 6. Multiple Outlet Power Strip.
 7. A Tivo Users Manual
 8. A Backup Disk for the AGFM
3. **Wire it up like the colorful diagram shows.** Note that the white extension cords were provided so that you could plug two Wall Warts into the female end and use only one slot in the multiple outlet strip for each of the two pair of Wal Warts you have to power up.

Place the Tivo Controller on top of the Tivo Recorder as in the picture on the following page.

Each of the three little white monitors has a Wal Wart, and, there is the one that delivers Power to the AGFM.

Use a stereo cable to connect the Manager's Monitor to the Controller and also use a stereo cable to connect the Video and Left Audio Channel out of the Tivo to the Respective inputs on the Controller Box.

Also, use a stereo cable to connect the Tivo Monitor.

You can use a single conductor RCA cable to connect the Show Room Monitor.

Be sure to connect the Square Button to the appropriate Jack in the Back.

The IR device must connect to IR#1 on the back of the Tivo Controller.

See the photo on the following page to see how this setup should look.

Turn the volume knobs up to "3" on the little monitors.

Turn on all three little monitors.

With everything plugged in to the outlet strip, plug in the outlet strip and turn it on.

You should see the standard license agreement I have with all my customers on the Manager's Monitor.

You should see the Tivo Startup screen and after a brief period, the Tivo Startup Cartoon.

Wait at least until you see the Tivo Startup cartoon appear to press Enter on the Keyboard, acknowledging the license agreement. The agreement has two short paragraphs, requiring two "Enter" presses before the system will go on to the next phase.

After you press Enter Twice to acknowledge the license agreement, the Tivo Monitor should pass through several screens, telling you what it is doing, and you should see what is happening on the Tivo by watching the Tivo Monitor.

When the system is all set up and running properly, it will end up with the Manager's Monitor showing your Options for using the Tivo Show Controller.

Here's how it is all packaged



The 3 Monitor Boxes contain the monitors used in the tech room to control and monitor the show, along with their respective power supplies.

The Wireless Keyboard Box contains the Wireless Keyboard (batteries installed), but no keyboard receiver. That is already connected to the Tivo Controller in the largest Box.

The Tivo Box contains the Tivo (with the IR device already attached to the front of it) and all the miscellaneous wires, power converter, cords, manuals, etc.

The Big Box contains the Tivo Controller with the Keyboard IR Receiver already attached.

Misc Stuff in the Tivo Box



In the Tivo Box, you will find 3 stereo RCA cables and one Single Conductor. Also, you will find the power cord for the Tivo, 2 short extension cords to plug the Wall Warts into. A multiple Outlet Strip to plug the Tivo, the Tivo Controller, and the two extension cords into which are powering the 3 Wall Warts for the monitors and the one Wall Wart for the AGFM DC Input supply. You will also find the AGFM DC Wall Wart. The Monitor Wall Warts are in the boxes with the monitors. Also, you will find a Tivo owner's guide and a Tivo remote control with batteries so you can manually play with the Tivo to see what's on it, or to, for other reasons, manually control it.

Note: There is also a Backup AGFM Floppy Disk not pictured here.


Ideal Test Setup



You can exercise most of the functions of the Tivo Show Controller right out of the box just like this. You should set it up like this and try out everything before trying to connect it to your show.

After everything is checked out and works in this state, you can connect the Top and Bottom Drawers to the connectors on the Back of the Controller as well as the Sound System to one of the Left Channel Audio Outputs on the back of the Tivo. You can also plug the house lights dimmer cable in, as well as the RCA video cable going out to the monitors in the showroom.

Wiring Diagram

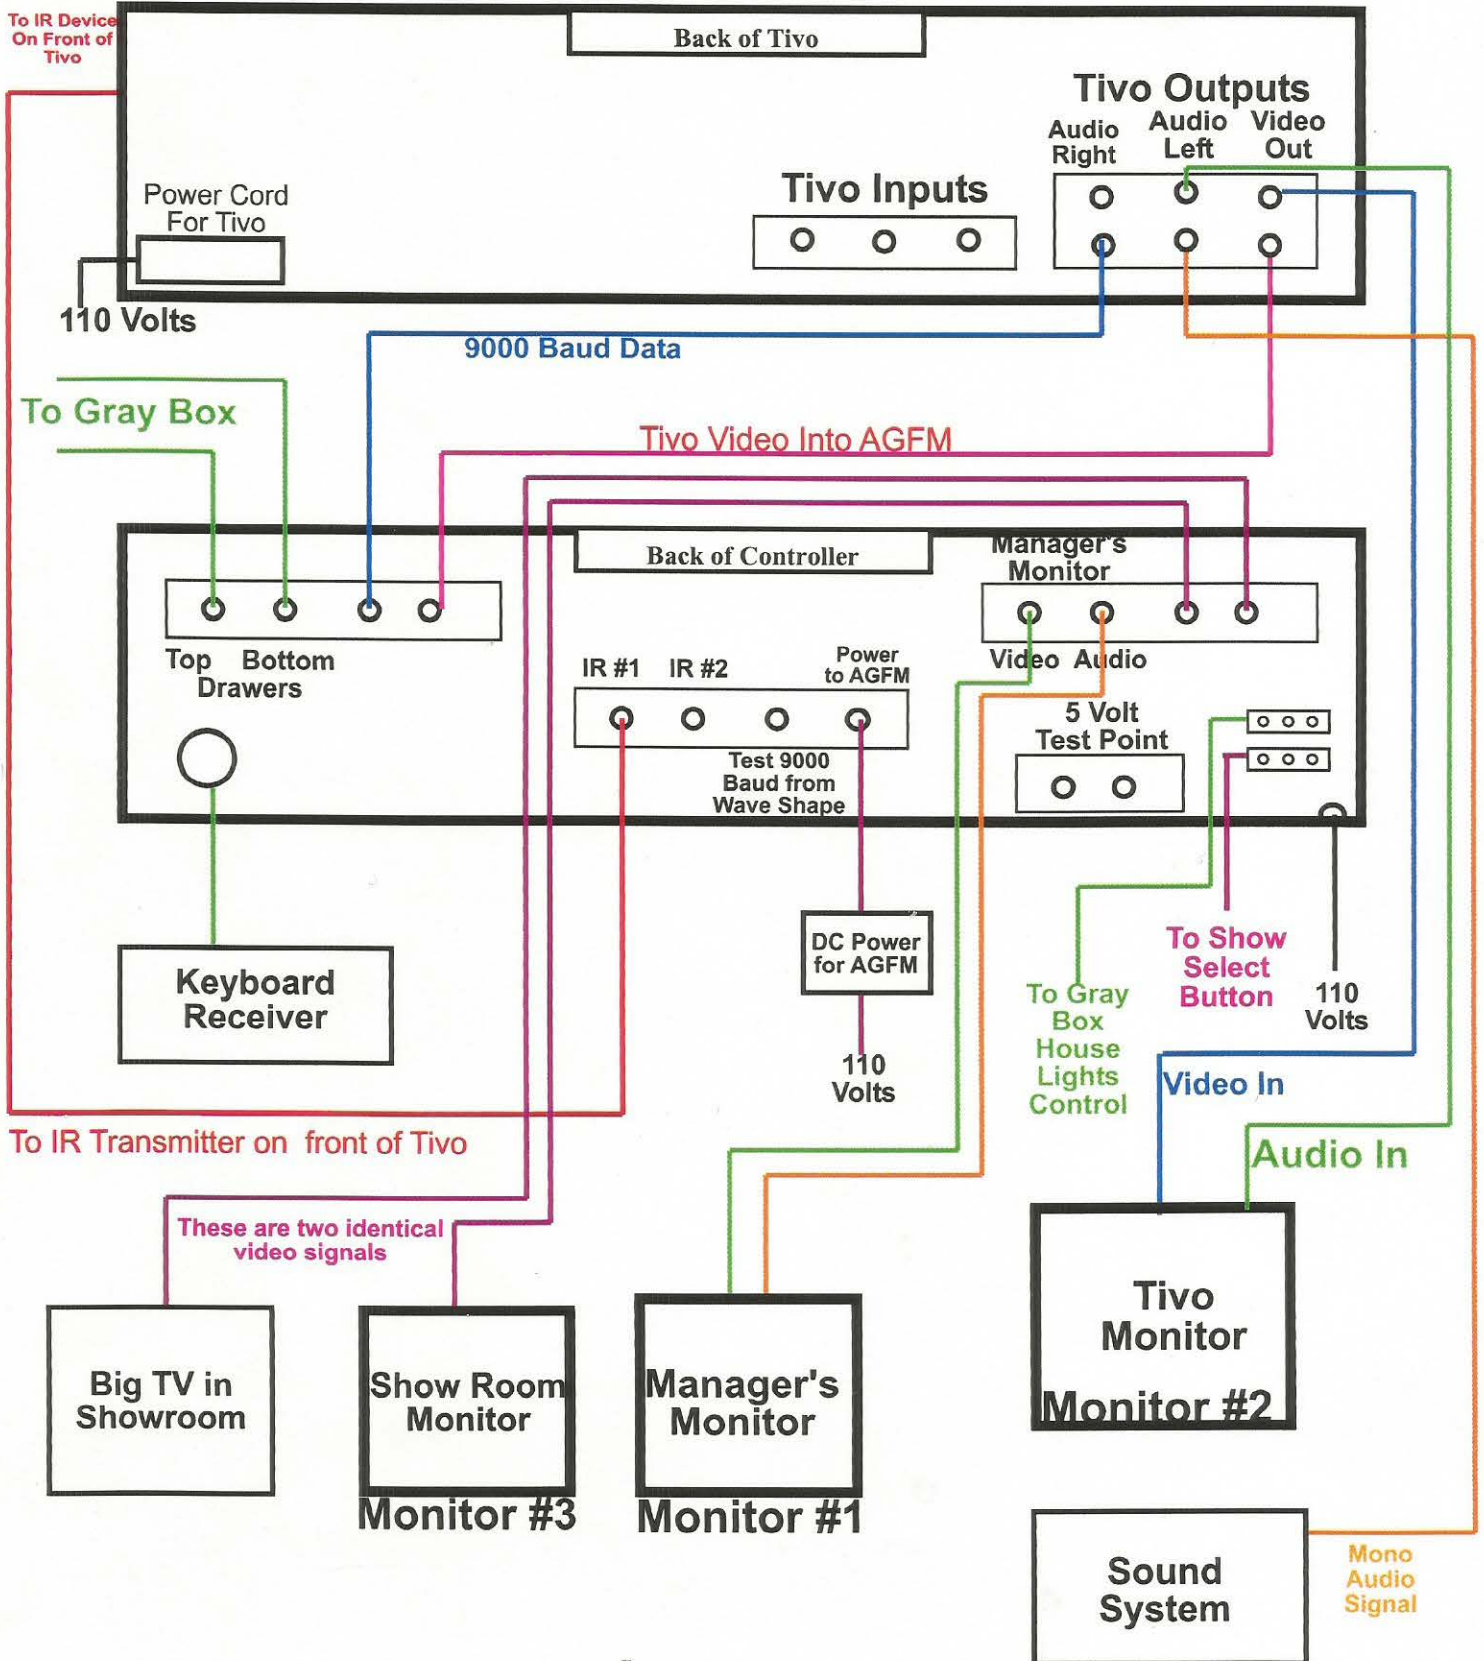

Starting Up

The manager has the capability to play any show on the Tivo at any time as well as the capability to stop a show from playing at any moment. By pressing the “Manager’s Button” the manager takes control of the system, stops the playing of any show that might be playing, automatically closes the curtains if they are open, and returns the system to the same Main Menu that comes up when the system is first turned on which allows the manager to decide what operation or operating mode he wishes to enable.

When the system is first powered up the Control Station Monitor will display the Main Menu. The Main Menu is where you select what mode you want the system to Operate In or tell the system what song you want it to play for you. The various selections available on the Main Menu are:

- **Play on Button Press-** The system waits for a button press from the customer and plays the next Thank You Show and a Normal Show when it sees a customer press a button. When the system is waiting for a customer button press, the customer button flashes quickly.
- **Play on Button Press or Time Out-**The system waits for a button press, but if it doesn’t receive one in a given amount of time, it automatically plays a “Normal Show” without a preceding “Thank You” show.
- **Play By Clip #-** The clip numbers corresponding to each show on the Tivo can be entered and the specific show played directly. Note that due to a slight bug in the system, if you fail to enter the clip # using 3 digits, you will be punished severely, but not catastrophically.
- **Birthday (or other special) Shows-** This option is similar to “Play by Clip #” in that it allows you to play a show directly, but, instead of entering a Clip# for the show, it’s title is listed in a menu so that you don’t have to look up the clip #. This can be faster for commonly played shows.
- **Time Out Utilities-** This button will take you to a set of utilities that allows you to change the amount of time the controller will wait before pressing the Start Button automatically, when you are playing shows either by Button Press or Time Since the Last Show Played.
- **Play From a Particular Clip # -** This allows you to set the starting clip # you wish to start playing from instead of wherever in the list you happen to be.
- **Adjust IR Frequency-** This is a utility that allows you to easily check the Frequency of the IR transmitter if you have any problems communicating with the Tivo.
- **Diagnostics-** This gives readings Creative Engineering will need if and when we need to talk about something on the phone.

More controls and capabilities will be released with each version of the Operating system.

This version attempts to provide the most desperately needed functions along with a few niceties, but will be updated with bug fixes new features and new shows. The updates will come in the form of a new floppy control disk and a new Tivo Hard Drive with simple assembly instructions. The floppy contains the new features and the hard drive contains the new songs.

Upgrades, New Features, New Shows, Bug fixes

We expect to have frequent upgrades available to the system, which we are extending to you, the first adopters of the new Tivo Control System, for free for the first year you have your system. To get the upgrade, we require that you will send back the Previous Version Hard drive and Floppy Disk after installing the new one. To assure us that you will return these disks, we will require a security deposit from you before we send the new disk and drive. Your deposit will be refunded when the old Disk and Drive are returned to Creative Engineering, Inc. The easiest way to accomplish this is for you to send a payment via PayPal to our account. This takes the money from your credit card. Then, when we refund the money, no charges will be assessed to either one of us since Paypal doesn’t charge for transactions that end up in a refund.

Watch for the latest information about upgrades available at www.robotsandgames.com, coming early next year.


Testing Things

Test the Tivo— Use the Tivo Remote to navigate around on the Tivo and see the Now Showing Menu, Select a Song, and Play it. Aim the Remote right at the center of the Tivo. Here's exactly what you should press to do this:

- 1— Press the Tivo Button at the top of the Remote. It should take you to The Tivo Main Menu.
- 2— If you are OK so far, the Tivo Monitor will show the Tivo Main Menu.
- 3— Press the "Select" button. It should take you to the Now Showing List.
- 4— Press the Select Button Again to play the first clip on the Tivo. You should Hear the Herman The Worm show start up. You won't see any video because there is none with this show, but you should see a little video noise from time to time.
- 5— You don't have to listen to the whole Herman the Worm show.

This section is not completed. As this manual is improved and finished, you will receive an updated version.

Inside The Tivo Controller

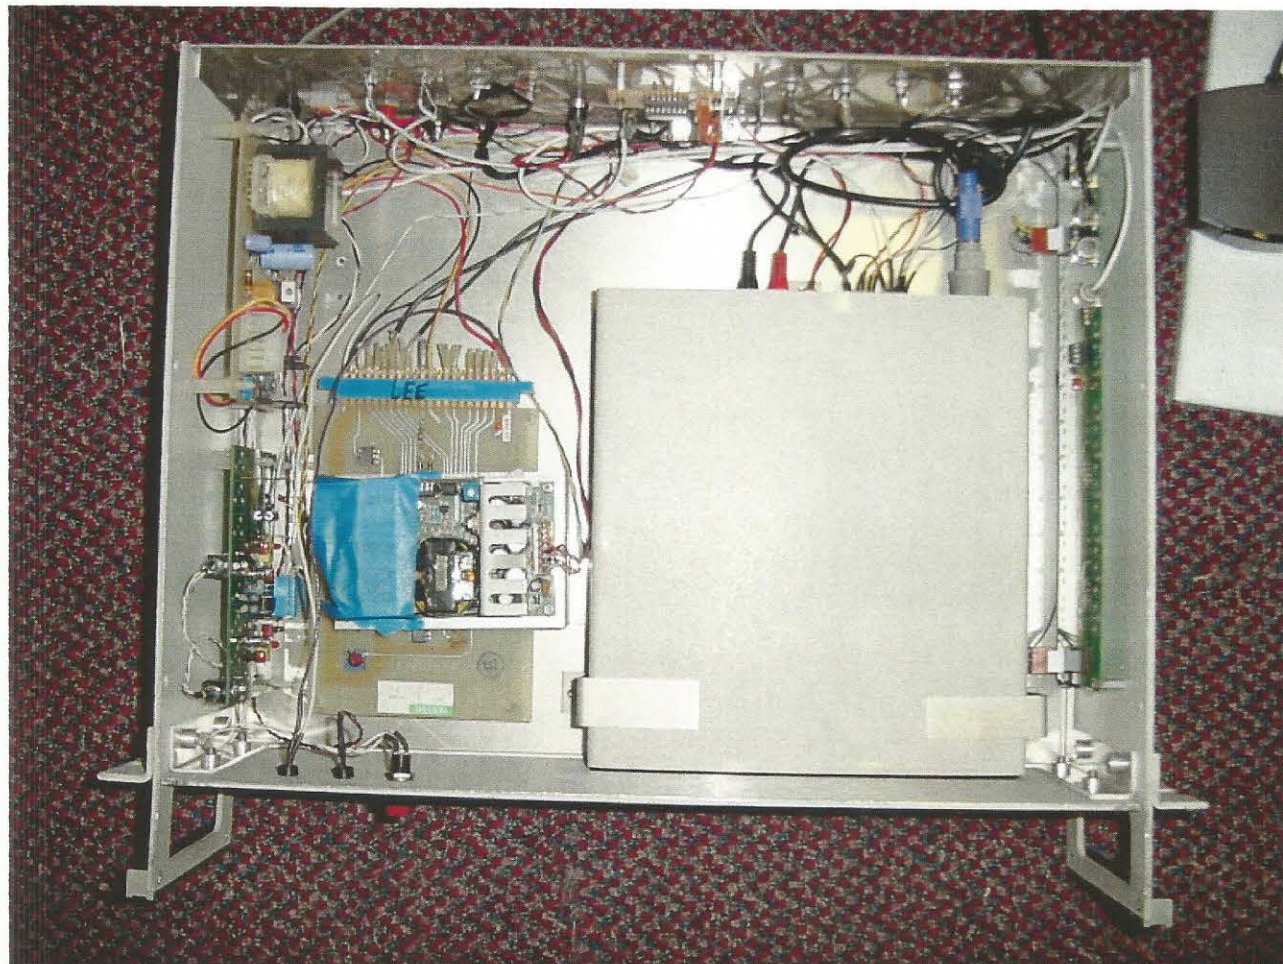

Tivo Show List Page 1

Clip #	Header #	Header Count	In Hex	Show Title	Tivo Title	Show Type	Source
01	281	36	001A	Herman The Worm Thank You	11/11 12:34	Thank You	6 Hour Video
02	280	84	0019	I Swear	11/11 12:21	Normal	6 Hour Video
03	279	3C	0018	Gatorland 1	11/11 11:34	Thank You	6 Hour Video
04	278	3E	0017	Heard It Through The Grapevine	11/11 11:26	Normal	ADAT
05	277	56	0016	Gatorland 2	11/11 11:19	Thank You	6 Hour Video
06	276	A4	0015	Spiderwebs	11/11 11:12	Normal	6 Hour Video
07	275	A0	0014	Gatorland Three	11/11 11:05	Thank You	6 Hour Video
08	274	94	0013	3 Little Fishes	11/11 10:53	Normal	6 Hour Video
09	273	48	0012	Tips Only Thank You	11/10 2:39	Thank You	ADAT
10	272	62	0011	Baby When The Lights Go Out	11/10 2:19	Normal	6 Hour Video
11	271	1A	0010	User Friendly	11/09 5:40	Thank You	6 Hour Video
12	270	86	000F	Good Vibrations	11/09 5:24	Normal	6 Hour Video
13	269	86	000E	Happy Birthday	11/09 4:36	Normal	6 Hour Video
14	268	0A	000D	Power Blue Thank You	11/09 4:26	Thank You	6 Hour Video
15	267	08	000C	Music Box Doll	11/09 3:27	Normal	6 Hour Video
16	266	50	000B	Wipies Thank You	11/09 2:20	Thank You	6 Hour Video
17	265	14	000A	Simple Simon Says	11/09 2:03	Normal	6 Hour Video
18	264	32	0009	Lights Off Thank You	11/09 1:45	Thank You	6 hour Video
19	263	36	0008	Beatle's Medley #2	11/09 8:24	Normal	ADAT
20	262	40	0007	Name Change Thank You	11/09 8:07	Thank You	6 Hour Video
21	261	54	0006	Santa Claus Is Coming	11/09 7:17	Normal	ADAT
22	260	54	0005	Think For Yourself Thank You	11/08 4:49	Thank You	6 Hour Video
23	259	54	0004	Run Run Rudolf	11/08 4:40	Normal	ADAT
24	258	22	0003	You Made Our Day	11/08 4:36	Thank You	ADAT
25	257	50	0002	Still The One	11/08 4:26	Normal	ADAT
26	256	5E	0001	Got Cha Thank You	11/08 2:41	Thank You	ADAT
27	255			Ace In The Whole	11/08 2:10	Normal	ADAT
28	254	58	00FE	Karaoke — Twinkle Twinkle	11/01 3.24	Karaoke	6 Hour Video
29	253	3E	00FD	Karaoke — Mary Had A LittleLamb	11/01 3:14	Karaoke	6 Hour Video
30	252	3E	C1B0	Karaoke — Old Macdonald	11/01 3:04	Karaoke	6 Hour Video
31	251	5E	0004	Karaoke—Twist and Shout	11/1 2:51 A.M.	Karaoke	6 Hour Video
32	250	2E	00FA	Karaoke— ABC'S	11/1 2:39 A.M.	Karaoke	6 Hour Video
33	249	20	00F9	Thanks for Pressing a Button	10/25 5:15	Thank You	ADAT

Tivo Show List Page 2

Clip #	Header #	Header Count	In Hex	Show Title	Tivo Title	Show Type	Source
34	248	18	00F8	Loose Wheel	10/23 7:41	Normal	6 Hour Video
35	247	0C	00F7	Guaranteed to Embarrass	10/23 7:31	Thank You	2 Hour Video
36	246	1A	00F6	Viva Las Vegas	10/23 7:25	Normal	6 Hour Video
37	245	3A	00F5	Pierce a Phobia	10/23 7:17	Thank You	Video
38	244	40	00F4	Simple Simon Says	10/23 7:10	Normal	6 Hour Video
39	243	1C	00F3	Herman The Worm	10/23 6:56	Thank You	ADAT
40	242	36	00F2	The Train	10/23 6:49	Normal	2 Hour Video
41	241	28	00F1	ESP	10/23 6:24	Thank You	ADAT
42	240	32	00F0	Leader of the Pack	10/23 6:17	Normal	ADAT
43	239	20	00EF	I Got Ya!	10/23 1:20	Thank You	ADAT
44	238	2A	00EE	Old Macdonald	10/23 1:15	Normal	ADAT
45	237	8A	00ED	Round and Round	10/23 1:11	Thank You	ADAT
46	236	2E	00EC	Gilligans Isle	10/23 1:06	Normal	ADAT
47	235	1A	00EB	Booton	10/23 1:03	Thank You	ADAT
48	234	18	00EA	The Lucky One	10/23 12:57	Normal	ADAT
49	233	0E	00E9	Cream Soda	10/23 12:55	Thank You	ADAT
50	232	0E	00E8	Workin on the Railroad	10/23 12:49	Normal	ADAT
51	229	4E	00E5	Swimming Cat	10/23 12:32	Thank You	2 hour Video
52	228	34	00E4	Lil Red Riding Hood	10/23 12:26	Normal	2 hour Video
53	227	2A	00E3	Tips Only	10/23 12:15	Thank You	ADAT
54	226	40	00E2	Little Arrows	10/23 12:08	Normal	6 Hour Video
55	225	2E	00E1	Power Blew	10/23 11:57	Thank You	6 Hour Video
56	224	44	00E0	I'll Be There For You	10/23 11:52	Normal	6 Hour Video
57	221	50	00DD	Wipies	10/23 11:33	Thank You	6 Hour Video
58	220	50	00DC	Oh Dawn	10/23 11:28	Normal	2 Hour Video
59	215	40	00D7	Name Change	10/22 8:43	Thank You	Video
60	214	48	00D6	I Feel Good	10/22 8:37	Normal	6 Hour Video
61	213	3C	00D5	Bugs Out	10/22 8:29	Thank You	ADAT
62	212	24	00D4	Hokey Pokey	10/22 7:24	Normal	ADAT
63	211	34	00D3	Gatorland 1	10/22 7:16	Thank You	Video
64	210	06	00D2	Change the World	10/22 7:09	Normal	ADAT
65	209	42	00D1	Gatorland 2	10/22 6:28	Thank You	6 Hour Video
66	208	34	00D0	Gimmee One Reason	10/22 5:29	Normal	ADAT

Tivo Show List Page 3

Tivo Clip #	Header #	Header Count	In Hex	Show Title	Tivo Title	Show Type	Source
67	205	56	00CD	Gatorland 3	10/22 5:02	Thank You	6 Hour Video
68	204	54	00CC	I Will	10/22 4:57	Normal	2 Hour Video
69	203	50	00CB	Herman The Worm	10/22 4:50	Thank You	Black Video
70	202	58	00CA	My Girl	10/22 4:44	Normal	2 hour Video
71	201	2E	00C9	Lights Out	10/20 8:13	Thank You	ADAT
72	200	2A	00C8	It's All Right	10/20 8:08	Normal	ADAT
73	195	2A	00C3	Water Under The Bridge	10/20 7:30	Thank You	ADAT
74	194	30	00C2	Barbie Girl	10/20 7:24	Normal	ADAT
75	193	10	00C1	Mandate	10/20 7:21	Thank You	ADAT
76	192	2E	00C0	Ummmbop	10/20 7:05	Normal	ADAT
77	189	2C	00BD	I Got Ya'	10/20 6:22	Thank You	ADAT
78	188	22	00BC	I Got You Babe	10/20 5:09	Normal	2 Hour Video
79	187	42	00BB	Round and Round	10/20 5:05	Thank You	ADAT
80	186	62	00BA	I Saw The Sign	10/20 4:59	Normal	2 Hour Video
81	185	36	00B9	Booton	10/20 4:36	Thank You	ADAT
82	184	50	00B8	Banana Hill	10/20 4:28	Normal	Black 2 Hour Vid
83	183	18	00B7	Cream Soda	10/20 4:20	Thank You	ADAT
84	182	54	00B6	Lovers Concerto	10/20 4:14	Normal	6 Hour Video
85	181	58	00B5	Swimming Cat	10/20 4:05	Thank You	2 Hour Video
86	180	72	00B4	Shout	10/20 3:27	Normal	2 Hour Video
87	173	6A	00AD	Gatorland 1	10/18 4:50	Thank You	6 Hour Video
88	172	10	00AC	The Name Game	10/18 4:27	Normal	6 Hour Video
89	171	7C	00AB	Gatorland 2	10/18 4:20	Thank You	6 Hour Video
90	170	44	00AA	Proud Mary/La Bamba	10/18 4:14	Normal	2 Hour Video
91	169	52	00A9	Gatorland 3	10/18 3:57	Thank You	6 Hour Video
92	168	82	00A8	Country Bear	10/18 3:51	Normal	2 Hour Video
93	167	A2	00A7	Hollar It Up Here!	10/17 7:21	Thank You	ADAT
94	166	98	00A6	We Wish You A Merry XMAS	10/17 6:53	Christmas	2 Hour Video
95	165	84	00A5	Pierce-A-Phobia	10/17 6:25	Thank You	6 Hour Video
96	164	68	00A4	Winter Wonderland	10/17 6:13	Christmas	2 Hour Video
97	163	60	00A3	Herman The Worm	10/17 6:07	Thank You	Black Video
98	162	92	00A2	Baby Baby	10/17 5:51	Normal	2 Hour Video
99	161	4E	00A1	Tips Only	10/08 8:28	Thank You	ADAT

Tivo Show List Page 4

Tivo Clip Number	Header #	Header Count	In Hex	Show Title	Tivo Title	Show Type	Source
100	160	8E	00A0	Lime In The Coconut	10/08 8:16	Normal	Black Video
101	157	5E	009D	Flash	10/08 7:57	Thank You	ADAT
102	156	88	009C	In America	10/08 7:50	Normal	Black Video
103	155	64	009B	Bugs Out	10/08 7:46	Thank You	ADAT
104	154	8C	009A	Bugle Boy	10/08 7:37	Normal	Black Video
105	153	56	0099	User Friendly	10/08 7:28	Thank You	ADAT
106	152	84	0098	Goodnight Sweetheart	10/08 7:13	Normal	Black Video
107	151	68	0097	Lights Off	10/08 7:07	Thank You	ADAT
108	150	72	96	Happy and You Know It	10/08 6:59	Normal	ADAT
109	149	74	95	You Made Our Day	10/08 6:51	Thank You	ADAT
110	148	58	94	Do Your Ears Hang Low	10/08 6:41	Normal	6 Hour Video
111	147	6A	93	Oh My Darlin	10/08 6:33	Thank You	ADAT
112	146	94	92	Don't Speak	10/08 6:21	Normal	Black Video
113	145	56	91	Water Under The Bridge	10/08 6:15	Thank You	ADAT
114	144	86	90	Macarena	10/08 6:03	Normal/Dance	Black Video
115	143	54	8F	Mandate from the People	10/08 5:47	Thank You	ADAT
116	142	8A	8E	Free As a Bird	10/08 5:22	Normal	Black Video
117	141	80	8D	All I Wanna Do	10/08 5:13	Birthday	Black Video
118	138	A0	8A	Power Blew	10/08 2:49	Thank You	6 Hour Video
119	137	A2	89	Our House	10/08 2:41	Normal	Video
120	136	9A	88	Fatz' Name Change	10/08 2:28	Thank You	6 Hour Video
121	135	96	87	Hot Fun in the Summertime	10/07 9:03	Normal	Video
122	134	94	86	Gatorland #3	10/07 8:56	Thank You	6 Hour Video
123	133	A4	85	Aint No Mountain	10/07 7:56	Normal	ADAT
124	132	A4	84	Gatorland #2	10/07 7:49	Thank You	6 Hour Video
125	131	9E	83	Poetry In Motion	10/07 7:40	Normal	2 Hour Video
126	130	A6	82	Happy Birthday	10/07 7:29	Birthday	6 Hour Video
127	129	A2	81	Spanish Birthday	10/07 6:45	Birthday	6 Hour Video
128	128	9A	80	Birthday Medley	10/07 6:13	Birthday	6 Hour Video
129	127	AC	7F	Gatorland #1	10/07 6:04	Thank You	6 Hour Video
130	126	94	7E	Gift Wrap Show	10/07 5:53	Normal	2 Hour Video
131	125	A6	7D	Pierce-A-Phobia	10/07 5:32	Thank You	6 Hour Video
132	124	86	7C	Somewhere Over The Rainbow	10/07 5:12	Normal	6 hour Video
133	121	AA	79	Think For Yourself	10/07 3:31	Thank You	Video

ROCK-AFIRE EXPLOSION: TIVO SHOW CONTROL MANUAL

Date of Origin: 2002
Archived: 1-3-23
Submission by pikalove
Version 1.0

The documents contained herein are for educational use only.
Please do not replicate, redistribute, or make any unauthorized
printings. All intellectual property including characters,
artwork, photography, and slogans are trademark and/or
copyright their respective owners.

